

**POWER EVERYDAY!**  
**Cummins Generator**  
**GDD-C124/GDD-C124S**

**6BTA5.9-G2**

**Prime Power: 99KW/124KVA**

**Standby Power: 109KW/136KVA**



**Increased availability for new operations**

Reliable, robust and versatile generator.  
Ready to deliver power for a next job.

**Increased uptime during operations**

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

**Reduced transport and installation costs**

The compact and robust design with integrated transport features enables faster and safer transport and installation.

**Reduced service & maintenance costs**

Longer service intervals.  
Quicker and more efficient service jobs.

**Premium resale value**

Designed and built to last.

**SAFETY**

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

**Cummins Series**

25KVA--1400KVA



**GOLDENGORRY**

**RAWSUNPOWER**

**Xiamen Goldengorry Electric Machinery  
Imp and Exp Co., Ltd.  
Fujian Rawsun Power Co., Ltd.**

Changtai Industry Zone, Zhangzhou, Fujian, China

Tel: +86-0596-8225007 Fax: +86-0596-8225006

Web: [www.goldengorry.com](http://www.goldengorry.com) or [www.rawsunpower.com](http://www.rawsunpower.com)

E-mail: [sales@goldengorry.com](mailto:sales@goldengorry.com)

# Technical Data

Type	GDD-C124/C124S	
		<b>60Hz</b>
Rated speed	r/min	1800
Rated power factor(lagging)		0.8
Rated prime power	Kw/KVA	99/124
Rated standby power	Kw/KVA	109/136
Sound power level	dB(A)	73

## Basic unit

### Fuel autonomy

full load	L/h	30
75% load	L/h	23
50% load	L/h	16
Capacity fuel tank	L	235

## Engine-Cummins

Model	6BTA5.9-G2	
Rated net power(with fan)	Kw	118.8
Displacement	Liquid	5.9
No. cylinders	6	
Bore*Stroke	mm	102*120
Coolant	Liquid	29
Aspiration	Turbo, Water/Air Cooling	

## Alternator-GAS


Model	GAS-274D	
Degree of protection/Insulation class	IP23/H	

## Control Panel-Smartgen

Model	HGM 6120	
-------	----------	--

## Unit dimensions(Basic unit)

L*W*H(Open style)	m	2250*880*1325
(Soundproof style)	m	2850*1100*1550
Weight(Open type)	kg	1200
(Soundproof type)	kg	1535

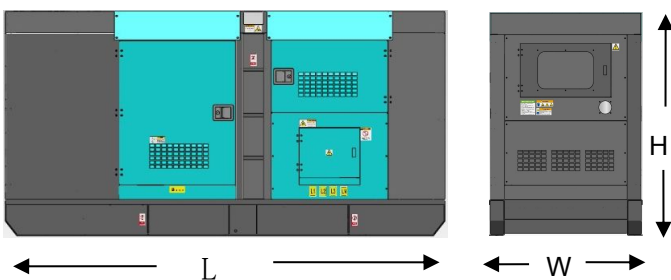


## Standard Control Panel

Smartgen HGM 6120



## Options

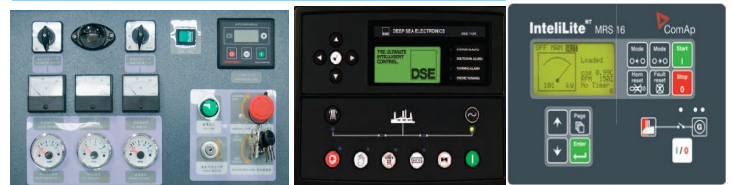

## Standard Features

Standard Features	GGC
Engine(DCEC Cummins)	●
Radiator 50°C max, fans are driven by belt	●
24V charge alternator	●
Alternator: single bearing alternator IP23, insulation class H/H	●
Goldengorry standard auto control system	●
One set of air filter, fuel filter, oil filter	●
Main line circuit breaker/MCCB	●
Base fuel tank	●
Two 12V batteries, rac and cable	●
Exhaust system(Ripple flex exhaust pipe, exhaust siphon, flange, muffler)	●
User manual	●

## Options

Battery charge	○
Engine heater	○
Alternator heater	○
Water separator	○
Remote control panel	○
Automatic transfer switch/ATS	○
Switch box	○
Standard:	●
Options:	○

## Warranty\*

### Cummins Engine

12 months from date of purchase and 1000 hours.

### Generator

12 months from date of purchase or 1000 hours(whichever occurs first).

More information, pls refer to our web-site: [www.goldengorry.com](http://www.goldengorry.com) or [www.rawsunpower.com](http://www.rawsunpower.com)

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.