

POWER EVERYDAY!

Fawde Generator

GDD-X150/X150S

6DF2-19D

Prime Power: 120KW/150KVA

Standby Power: 140KW/175KVA



Increased availability for new operations

Reliable, robust and versatile generator.
Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.
Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

SAFETY
<ul style="list-style-type: none">● Operate safely in accordance with proper operation manual.● To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

Fawde Series

15KVA--375KVA



RAWSUNPOWER

**Xiamen Goldengorry Electric Machinery
Imp and Exp Co., Ltd.
Fujian Rawsun Power Co., Ltd.**

Factory: Changtai Industry Zone, Zhangzhou, Fujian, China

Tel: +86-0596-8225007 Fax: +86-0596-8225006

E-mail: sales@goldengorry.com

Web: www.goldengorry.com or www.rawsunpower.com

Technical Data

Type		GDD-X150S
		50Hz
Rated speed	r/min	1500
Rated power factor(lagging)		0.8
Rated prime power	Kw/KVA	120/150
Rated standby power	Kw/KVA	140/175
Sound power level	dB(A)	74

Basic unit

Fuel autonomy

full load	L/h	28
75% load	L/h	20
50% load	L/h	15
Capacity fuel tank	L	300

Engine-FAWDE

Model		6DF2-19D
Rated net power(with fan)	Kw	140
Displacement	Liquid	7.13
No. cylinders		6
Bore*Stroke	mm	110*125
Coolant	Liquid	37.22
Aspiration		Turbo charged

Alternator-GAS


Model		GAS-274F
Degree of protection/Insulation class		IP23/H

Control Panel-Smartgen

Model		HGM 6120
-------	--	----------

Unit dimensions(Basic unit)

L*W*H(Open style)	m	2435*880*1535
(Soundproof style)	m	3200*1200*1650
Weight(Open type)	kg	1500
(Soundproof type)	kg	2200

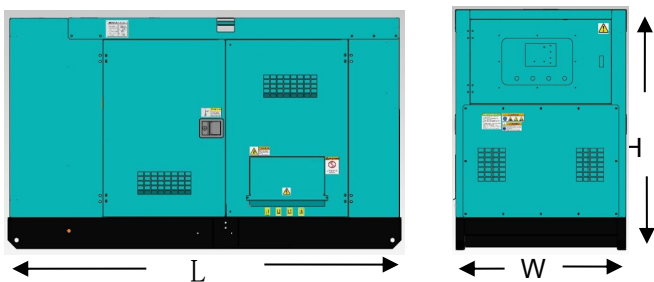

Standard Control Panel

Smartgen HGM6120



Options



Standard Features

- Engine(FAWDE) ●
- Radiator 50°C max, fans are driven by belt ●
- 24V charge alternator ●
- Alternator: single bearing alternator IP23, insulation class H/H ●
- Goldengorry standard auto control system ●
- One set of air filter, fuel filter, oil filter ●
- Main line circuit breaker/MCCB ●
- Base fuel tank ●
- Two 12V batteries, rac and cable ●
- Exhaust system(Ripple flex exhaust pipe, exhaust siphon, flange, muffler) ●
- User manual ●

GGC

Options

- Battery charge ○
 - Engine heater ○
 - Alternator heater ○
 - Water separator ○
 - Remote control panel ○
 - Automatic transfer switch/ATS ○
 - Switch box ○
- Standard: ● Options: ○

Warranty*

FAWDE Engine

12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours(whichever occurs first).

More information, pls refer to our web-site: www.goldengorry.com or www.rawsunpower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.