



RAWSUNPOWER

GOLDENGORRY

**SUPER SOUNDPROOF
DIESEL GENERATORS**

MODEL:GDD-Y63S



63KVA

Genset Features

Increased availability for new operations

Reliable, robust and versatile generator.
Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.
Quicker and more efficient service jobs.

Power Everyday!
Super Soundproof
58dB(A)@7m

Manufactured by:
**Xiamen Goldengorry Electric Machinery
Imp and Exp Co., Ltd**
Fujian Rawsun Power Co., Ltd.

Add: Changtai Industry Zone, Zhangzhou, Fujian, China
Tel: +86-0596-8225007 Fax: +86-0596-8225006
E-mail: sales@goldengorry.com
Web: www.goldengorry.com or www.rawsunpower.com

SPECIFICATIONS

MODEL	GDD-Y63S	
-------	----------	--

ALTERNATOR **STAMFORD UCI 224D**

Frequency	Hz	60
Out Rating(KVA)	Continuous	62.5
	Standby	69
No. of Phases	1-Phase(2 Wires) or 3-Phase(4 Wires)	
Rated Voltage	V	200~400/380~440
Power Factor	0.8(Lagging)	
Excitation	Brushless(With AVR)	
Insulation	Class H/ IP 23	

ENGINE **YANMAR 4TNV106T-GGE**



Type	Direct injected, Turbocharger	
Output Rating	Kw/rpm	60.9/1800
No. of Cylinders-Bore*Stroke	mm	4-106*125
Piston Displacement	L	4.412
Fuel	ASTM No.2 Diesel Fuel or Equivalent	
Fuel Consumption	g/kW.h	220.4
Battery Capacity	V-Ah	12V-1*80A
Fuel Tank Capacity	L	126

CONTROL SYSTEM **SMARTGEN HGM 1780**

UNIT

Dimensions	mm	2440*1050*1350
Dry Weight	kg	1150

(Specifications are subject to change without prior notice.)

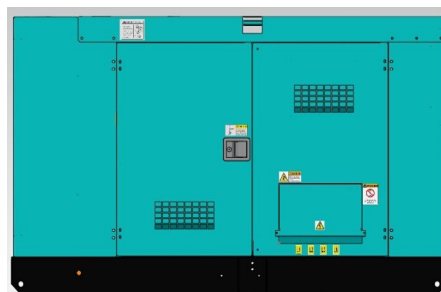

← L →

← W →

H