

# POWER EVERYDAY!

## Fawde Generator

### GDD-X100/X100S

# 6DF2D-14D

**Prime Power: 80KW/100KVA**

**Standby Power: 88KW/110KVA**



### Increased availability for new operations

Reliable, robust and versatile generator.  
Ready to deliver power for a next job.

### Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

### Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

### Reduced service & maintenance costs

Longer service intervals.  
Quicker and more efficient service jobs.

### Premium resale value

Designed and built to last.

### SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

## Fawde Series

15KVA--375KVA



## RAWSUNPOWER

**Xiamen Goldengorry Electric Machinery  
Imp and Exp Co., Ltd.  
Fujian Rawsun Power Co., Ltd.**

Factory: Changtai Industry Zone, Zhangzhou, Fujian, China

Tel: +86-0596-8225007 Fax: +86-0596-8225006

E-mail: sales@goldengorry.com

Web: www.goldengorry.com or www.rawsunpower.com

# Technical Data

Type		GDD-X100S
		<b>50hZ</b>
Rated speed	r/min	1500
Rated power factor(lagging)		0.8
Rated prime power	Kw/KVA	80/100
Rated standby power	Kw/KVA	88/110
Sound power level	dB(A)	73

## Basic unit

### Fuel autonomy

full load	L/h	19
75% load	L/h	14.3
50% load	L/h	9.5
Capacity fuel tank	L	200

## Engine-FAWDE

Model		6DF2D-14D
Rated net power(with fan)	Kw	96
Displacement	Liquid	6.55
No. cylinders		6
Bore*Stroke	mm	110*115
Coolant	Liquid	12.6
Aspiration		Turbo charged

## Alternator-GAS


Model		GAS-274C
Degree of protection/Insulation class		IP23/H

## Control Panel-Smartgen

Model		HGM 6120
-------	--	----------

## Unit dimensions(Basic unit)

L*W*H(Open style)	m	2250*880*1325
(Soundproof style)	m	2850*1100*1550
Weight(Open type)	kg	1150
(Soundproof type)	kg	1450

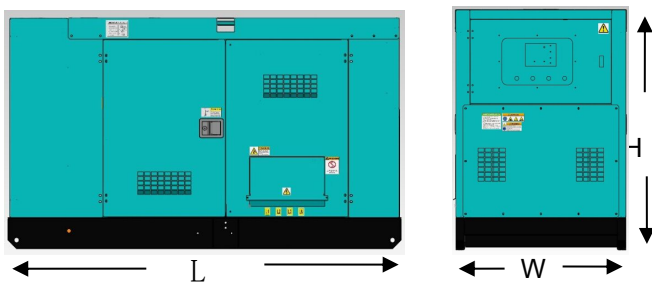

## Standard Control Panel

Smartgen HGM 6120



## Options



## Standard Features

Standard Features	GGC
Engine(FAWDE)	●
Radiator 50°C max, fans are driven by belt	●
24V charge alternator	●
Alternator: single bearing alternator IP23, insulation class H/H	●
Goldengorry standard auto control system	●
One set of air filter, fuel filter, oil filter	●
Main line circuit breaker/MCCB	●
Base fuel tank	●
Two 12V batteries, rac and cable	●
Exhaust system(Ripple flex exhaust pipe, exhaust siphon, flange, muffler)	●
User manual	●

## Options

Battery charge	○
Engine heater	○
Alternator heater	○
Water separator	○
Remote control panel	○
Automatic transfer switch/ATS	○
Switch box	○
Standard:	●
Options:	○

## Warranty\*

### FAWDE Engine

12 months from date of purchase and 1000 hours.

### Generator

12 months from date of purchase or 1000 hours(whichever occurs first).

More information, pls refer to our web-site: [www.goldengorry.com](http://www.goldengorry.com) or [www.rawsunpower.com](http://www.rawsunpower.com)

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.