



RAWSUNPOWER

GOLDENGORRY

**SUPER SOUNDPROOF
DIESEL GENERATORS**

MODEL:GDD-Y38S



YANMAR



Genset Features

Increased availability for new operations

Reliable, robust and versatile generator.
Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.
Quicker and more efficient service jobs.

Power Everyday!
Super Soundproof
58dB(A)@7m

Manufactured by:
Xiamen Goldengorry Electric Machinery
Imp and Exp Co., Ltd
Fujian Rawsun Power Co., Ltd.

Add: Changtai Industry Zone, Zhangzhou, Fujian, China
Tel: +86-0596-8225007 Fax: +86-0596-8225006
E-mail: sales@goldengorry.com
Web: www.goldengorry.com or www.rawsunpower.com

SPECIFICATIONS

MODEL	GDD-Y38S	
-------	----------	--

ALTERNATOR		STAMFORD PI 144H
Frequency	Hz	60
Out Rating(KVA)	Continuous	41.1
	Standby	45.2
No. of Phases		1-Phase(2 Wires)or 3-Phase(4 Wires)
Rated Voltage	V	200~400/380~440
Power Factor		0.8(Lagging)
Excitation		Brushless(With AVR)
Insulation		Class H/ IP 23

ENGINE		YANMAR 4TNV98-GGE
--------	--	-------------------



Type		Direct injected, Natural aspirated
Output Rating	Kw/rpm	36.4/1800
No. of Cylinders-Bore*Stroke mm		4-98*110
Piston Displacement	L	3.319
Fuel		ASTM No.2 Diesel Fuel or Equivalent
Fuel Consumption	g/kW.h	231
Battery Capacity	V-Ah	12V-1*80A
Fuel Tank Capacity	L	76

CONTROL SYSTEM	SMARTGEN HGM 1780	
----------------	-------------------	--

UNIT

Dimensions	mm	2140*950*1200
Dry Weight	kg	960

(Specifications are subject to change without prior notice.)

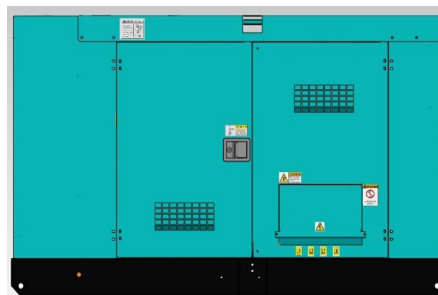

H

L

W